

# Attachment Illustrated Parts List



**MASSEY FERGUSON**  
LAWN & GARDEN EQUIPMENT

**AGCO**

## Attachment

Mfg. No.	Description
1694395	Frame, Front Attachment

***Simplicity***

MANUFACTURING, INC.  
500 N. Spring Street / PO Box 997  
Port Washington, WI 53074-0997 USA

[www.simplicitymfg.com](http://www.simplicitymfg.com)

© Copyright 2003 Simplicity Manufacturing, Inc. All Rights Reserved. Printed In USA.


Rev. 11/2003

TP 400-3877-00-AT-SMA

## Frame Group

NOTE: Unless noted otherwise,  
use the standard hardware torque  
specification chart.

986338

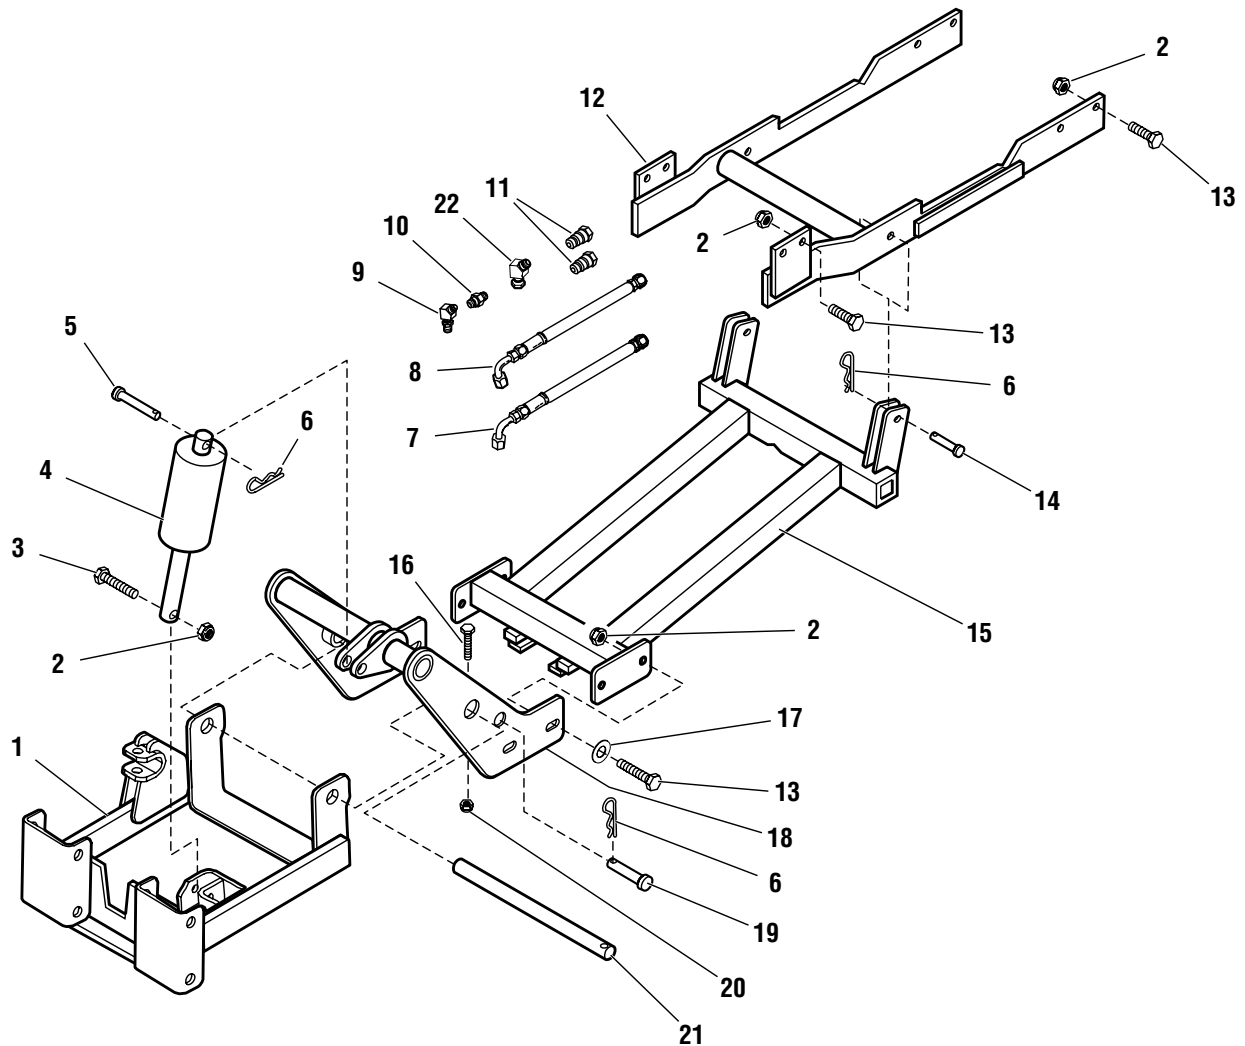

The above parts group applies to the following Mfg. Nos.:

1694395 - Frame

**Frame Group**

REF NO.	PART NO.	QTY.	DESCRIPTION
1	1724980	1	PUSH BAR ASSEMBLY, Front
2	1960355	13	LOCKNUT, Hex, 1/2-13
3	1960462	1	CAPSCREW, Hex Head, 1/2-13 x 2-1/2
4	1716944	1	CYLINDER ASSEMBLY
5	1711773	1	PIN, Clevis, 1/2 x 2
6	1960033	5	CLIP, Hair Pin
7	1725319	1	HOSE ASSEMBLY, Hydraulic, 20" Long
8	1725318	1	HOSE ASSEMBLY, Hydraulic, 30" Long
9	172320	1	FITTING, Elbow, 1/8 NPT, 1/2-20
10	919171	1	FITTING, Tube, Male
11	173359	2	NOSE PIECE ASSEMBLY
12	1725002	1	SUB FRAME ASSEMBLY, Front
13	1920328	12	CAPSCREW, Hex Head, 1/2-13 x 1-1/2
14	1960038	2	PIN, Yoke, 5/8 x 1-13/16
15	1725045	1	HITCH ASSEMBLY, Rear
16	1921159	1	CAPSCREW, Hex Head, 1/4-20 x 2-1/4
17	1960170	4	WASHER, 1/2
18	1725046	1	HITCH ASSEMBLY, Front
19	1725049	2	PIN, Clevis, 5/8 x 2-1/2
20	1920397	1	LOCKNUT, Hex, 1/4-20
21	1725048	1	SHAFT, 1 x 14
22	1725520	2	FITTING, Swivel, 1/4-18

**Footnotes**


---

**The above parts group applies to the following Mfg. Nos.:**

1694395 - Frame

# Hardware Identification & Torque Specifications

## Common Hardware Types

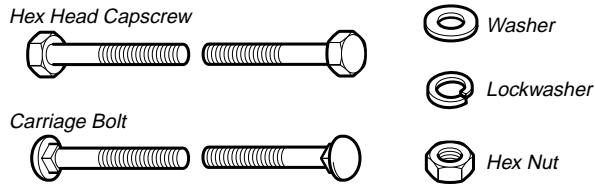





## Standard Hardware Sizing

When a washer or nut is identified as **1/2"**, this is the *Nominal size*, meaning the *inside diameter* is 1/2 inch; if a second number is present it represent the *threads per inch*

When bolt or capscrew is identified as **1/2 - 16 x 2"**, this means the *Nominal size*, or *body diameter* is 1/2 inch; the second number represents the *threads per inch* (16 in this example, and the final number is the *body length* of the bolt or screw (in this example 2 inches long).

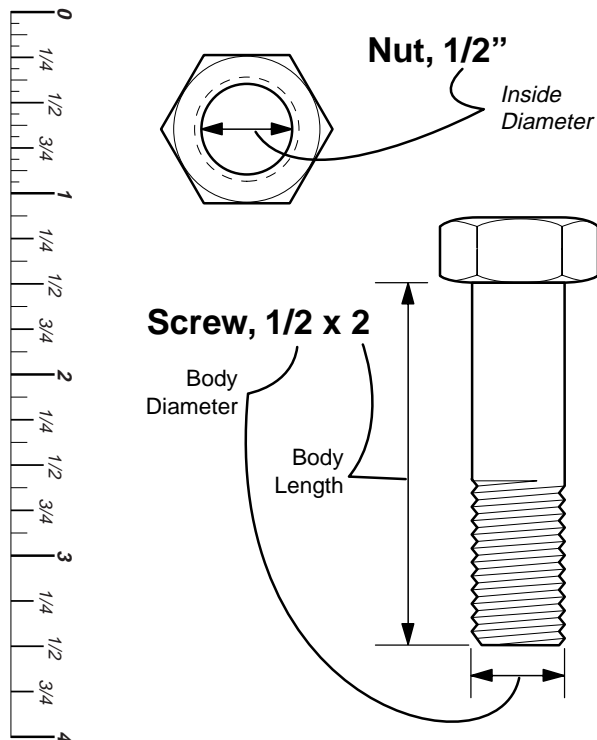**The guides and ruler furnished below are designed to help you select the appropriate hardware and tools.**



Torque Specification Chart						
FOR STANDARD MACHINE HARDWARE (Tolerance $\pm 20\%$ )						
Hardware Grade	 SAE Grade 2	 SAE Grade 5	 SAE Grade 8			
Size Of Hardware	<i>in/lbs</i> <i>ft/lbs</i>	Nm.	<i>in/lbs</i> <i>ft/lbs</i>	Nm.	<i>in/lbs</i> <i>ft/lbs</i>	Nm.
8-32	19	2.1	30	3.4	41	4.6
8-36	20	2.3	31	3.5	43	4.9
10-24	27	3.1	43	4.9	60	6.8
10-32	31	3.5	49	5.5	68	7.7
1/4-20	66	7.6	8	10.9	12	16.3
1/4-28	76	8.6	10	13.6	14	19.0
5/16-18	11	15.0	17	23.1	25	34.0
5/16-24	12	16.3	19	25.8	27	34.0
3/8-16	20	27.2	30	40.8	45	61.2
3/8-24	23	31.3	35	47.6	50	68.0
7/16-14	30	40.8	50	68.0	70	95.2
7/16-20	35	47.6	55	74.8	80	108.8
1/2-13	50	68.0	75	102.0	110	149.6
1/2-20	55	74.8	90	122.4	120	163.2
9/16-12	65	88.4	110	149.6	150	204.0
9/16-18	75	102.0	120	163.2	170	231.2
5/8-11	90	122.4	150	204.0	220	299.2
5/8-18	100	136	180	244.8	240	326.4
3/4-10	160	217.6	260	353.6	386	525.0
3/4-16	180	244.8	300	408.0	420	571.2
7/8-9	140	190.4	400	544.0	600	816.0
7/8-14	155	210.8	440	598.4	660	897.6
1-8	220	299.2	580	788.8	900	1,244.0
1-12	240	326.4	640	870.4	1,000	1,360.0

**NOTES**

- These torque values are to be used for all hardware excluding: locknuts, self-tapping screws, thread forming screws, sheet metal screws and socket head setscrews.
- Recommended seating torque values for locknuts:
  - for prevailing torque locknuts - use 65% of grade 5 torques.
  - for flange whizlock nuts and screws - use 135% of grade 5 torques.
- Unless otherwise noted on assembly drawings, all torque values must meet this specification.

## Wrench & Fastener Size Guide

